



Machines

**Single Directional Vibratory Plates 54–117 kg**  
APF 1033/1240/1250/1850

[www.ammann-group.com](http://www.ammann-group.com)



## Universal Application





## Easy Transport

### Effortless to work with

Model **APF 1033** is the lightest unit in this range and ideally suited for compaction work in very confined spaces, laying of light paving stones and light to medium road repair work (an optional water sprinkler system with 5 liter capacity is available). Garden- and Landscape contractors as well as home owners are using model APF 1033 in various applications. With the foldable handle and an operating weight of only 54 kg this unit is easy to be transported even in the trunk of a passenger car.

Model **APF 1240** : A vibrating plate for universal application with an operating width of 40 cm. This handy and versatile unit is available with Honda and Subaru petrol engine or alternatively with Yanmar diesel power. The unit has been designed to work in confined spaces on soil as well as on asphalt. The range of application includes light to medium sized patchwork and along obstacles such as curbs or retaining walls (a water sprinkler system with a 10 liter capacity water tank is available as an option).

Laying of paving stones  
(vulcan mat as option available)



**Convenient handling and transportation** with the foldable handle-the unit fits even in the trunk of a passenger car- or on site by using the optional transport wheels.

The **APF 1240** with Honda petrol engine can be equipped optionally with a **straight handle**. This allows a turning of the machine in confined areas without bumping against the walls with the rear part resp. with the handle. Transport wheels cannot be fitted on this special version.

Model **APF 1250** is specifically designed for work on bituminous material. It is equipped with a particularly formed base plate to ensure the highest results on black top. Together with an optional water sprinkler system (water tank capacity 10 liter) the APF 1250 is the number one choice for asphalt contractors.

Model **APF 1850** represents the ideal all-round compaction plate in this class of single directional plates. The unit is suitable for compaction work in soil, gravel and sand, on paving stones and on black top. A choice of two different engines is available: Honda petrol engine or Hatz diesel engine. The guide handle is foldable and can be removed from the machine.

**Low Vibration Guide Handle:** Our answer to the constant topic of hand-arm vibration. With the new vibration isolating handle from Ammann (patent applied for) the hand-arm vibration (the expected accelerations ref. DIN ISO EN 5349) are reduced as follows:

		APF 1240	APF 1250	APF 1850
		all engine versions		
Standard handle	around	6,2 m/s <sup>2</sup>	7,1 m/s <sup>2</sup>	8,0 m/s <sup>2</sup>
Vibration isolated handle	around	3,4 m/s <sup>2</sup>	2,1 m/s <sup>2</sup>	3,3 m/s <sup>2</sup>





## You will like our product series of APF


### Benefits on one page

Operator friendly and vibration isolated guide handle. Guide handle is foldable and removable for ease of transportation or compaction work in confined areas

Sturdy protection frame with central lifting point

Powerful Petrol- or Diesel engine

Corrosion free water tank and Water Sprinkler System for work on bituminous surface (Option)

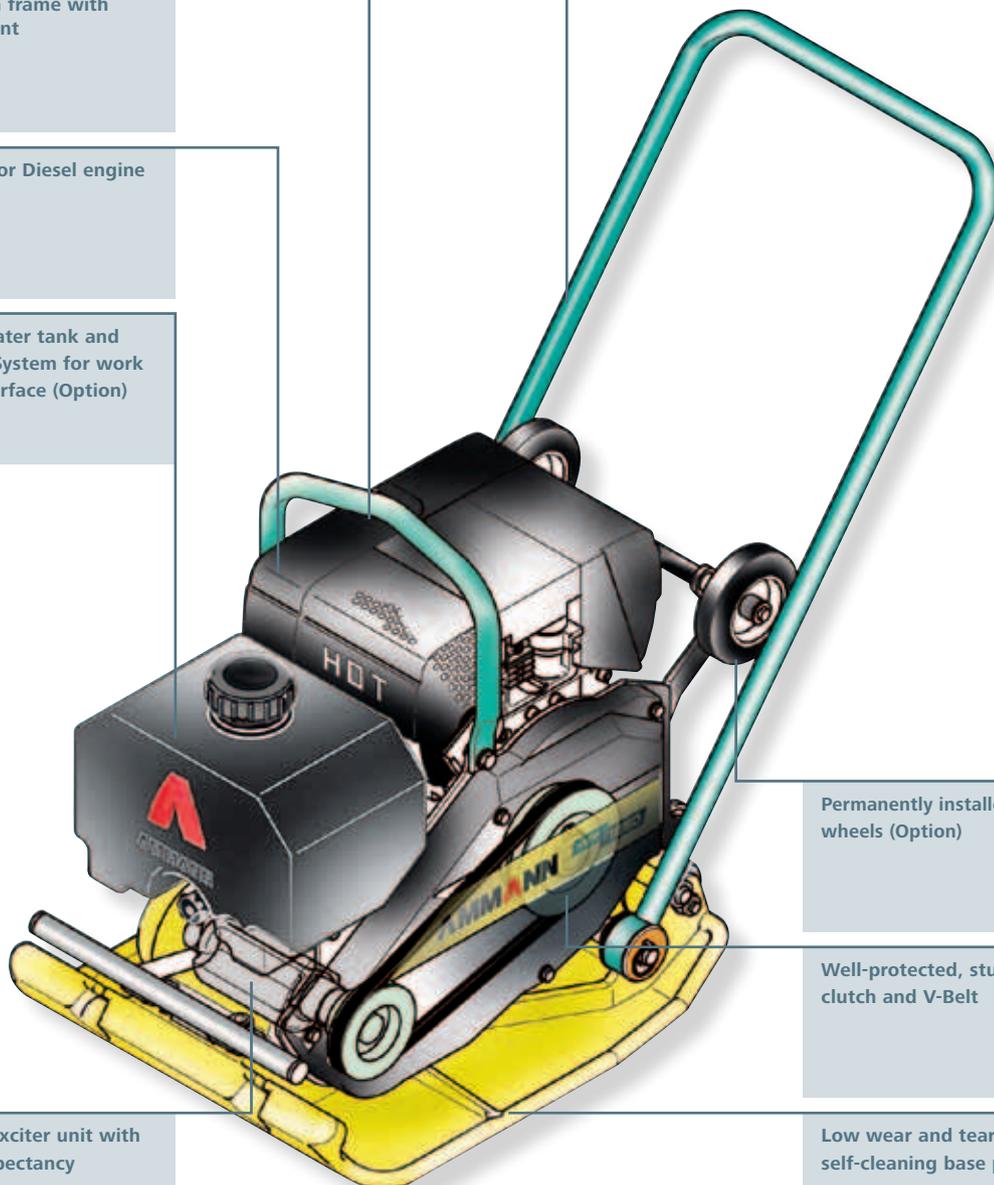

Permanently installed transport wheels (Option)

Well-protected, sturdy centrifugal clutch and V-Belt

Service friendly exciter unit with expanded life expectancy

Low wear and tear and self-cleaning base plate




## Technical Data


		APF 1033 Honda Petrol	APF 1240 Honda + Subaru Petrol	APF 1240 Yanmar Diesel	APF 1250 Honda + Subaru Petrol	APF 1850 Honda Petrol	APF 1850 Hatz Diesel
Operating weight	kg (lb)	54 (119)	70 (154)	85 (187)	72 (158)	100 (220)	110 (242)
Working width	mm (in)	330 (13)	400 (16)	400 (16)	500 (20)	500 (20)	500 (20)
Engine /Typ		GX 100	GX 120/EX 13	L 48 AE	GX 120/EX 13	GX 160	1 B 20
Power	HP (kW)	3 (2,2)	4/4,4 (2,9/3,2)	4,3 (3,2)	4/4,4 (2,9/3,2)	5 (3,7)	4,2 (3,1)
Speed	U/min. (rpm)	3600	3600	3200	3600	3200	3000
Vibration frequency up to	Hz (vpm)	100 (6000)	98 (5880)	98 (5880)	98 (5880)	85 (5100)	85 (5100)
Centrifugal force up to	kN (lbf)	10,5 (2,4)	12 (2,7)	12 (2,7)	12 (2,7)	18 (4)	18 (4)
Drive velocity max.	m/min (mph)	22 (14)	20 (12)	20 (12)	20 (12)	20 (12)	20 (12)
Gradeability	%	30	30	30	30	30	30
Max. incline to all sides	°	20	20	20	20	20	20
Working surface	m <sup>2</sup> (ft <sup>2</sup> )	0,11 (1,18)	0,14 (1,51)	0,14 (1,51)	0,18 (1,94)	0,2 (2,15)	0,2 (2,15)
Max. compaction depth*	cm (in)	10 (3,9)	15 (5,9)	18 (7,1)	13 (5,1)	20 (7,9)	25 (9,8)
<b>Optional equipment:</b>							
Transport wheels		-	x	x	x	x	x
Vulcolan mat		-	x	x	x	x	x
Water sprinkler system		x	x	x	x	x	x
Capacity of water tank	l (gal)	5 (1,1)	10 (2,2)	5 (1,1)	10 (2,2)	10 (2,2)	10 (2,2)
Low Vibration handle		-	x	x	x	x	x

\*depending on ground conditions


Specifications are subject to changes due to technical improvements




APF 1033




APF 1240 Honda/Subaru




APF 1240 Yanmar



APF 1250 Honda/Subaru



APF 1850 Honda



APF 1850 Hatz

Ammann distribution companies

Germany  
Ammann Verdichtung GmbH  
D-53773 Hennef  
Tel +49 22 42 880 20  
Fax +49 22 42 88 02 59  
info.avd@ammann-group.com

France  
Ammann France SAS  
F-94046 Créteil/Cedex  
Tel +33 1 45 17 08 88  
Fax +33 1 45 17 08 90  
info.afr@ammann-group.com

United Kingdom  
Ammann Equipment Ltd.  
Bearley Stratford upon Avon  
GB-Warwickshire, CV37 8XY  
Tel +44 1789 414 525  
Fax +44 1789 414 495  
info.ael@ammann-group.com

USA  
Ammann America Inc.  
Ponte Vedra, Florida 32082, USA  
Tel +1 904 543 1691  
Fax +1 888 266 1210  
info@ammann-america.com

Russia  
Ammann Russland o.o.o.  
RU-129343 Moscow  
Tel +7 495 933 35 61  
Fax +7 495 933 35 67  
info.aru@ammann-group.com

Brasil  
Ammann do Brasil  
Gravataí -RS- Brasil 94180 - 452  
Tel +55 51 9315 3099  
info.abr@ammann-group.com

South Africa  
Ammann Construction Machinery  
South Africa  
229 Hull Road, Rynfiel, Benoni  
Tel +27 11 849 3939  
Fax +27 11 849 8889

United Arab Emirates  
Ammann NME / Dubai  
Dubai  
Tel +971 4 299 14 49 | 7  
Fax +971 4 299 14 49  
info.nme@ammann-group.com

Ammann manufacturing companies

Switzerland  
Ammann Schweiz AG  
CH-4901 Langenthal  
Tel +41 62 916 61 61  
Fax +41 62 916 64 03  
info.aag@ammann-group.com

Germany  
Ammann Verdichtung GmbH  
D-53773 Hennef  
Tel +49 22 42 880 20  
Fax +49 22 42 88 02 59  
info.avd@ammann-group.com

Czech Republic  
Ammann Czech Republic a.s.  
CZ-54901 Nové Město nad Metují  
Tel +420 491 476 111  
Fax +420 491 470 405  
info.acz@ammann-group.com

Ammann Spare Parts  
Tel +41 62 916 66 66  
Fax +41 62 916 6804  
spareparts.machines@ammann-group.com

